

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000607

International filing date: 12 February 2005 (12.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0404328.7
Filing date: 27 February 2004 (27.02.2004)

Date of receipt at the International Bureau: 26 April 2005 (26.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 23 March 2005



27FEB04 EB76646-1 002813
P01/7700 0.00-0404328.7 ACCOUNT CHA


Patents Form 1/77

Patents Act 1977
(Rule 16)

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

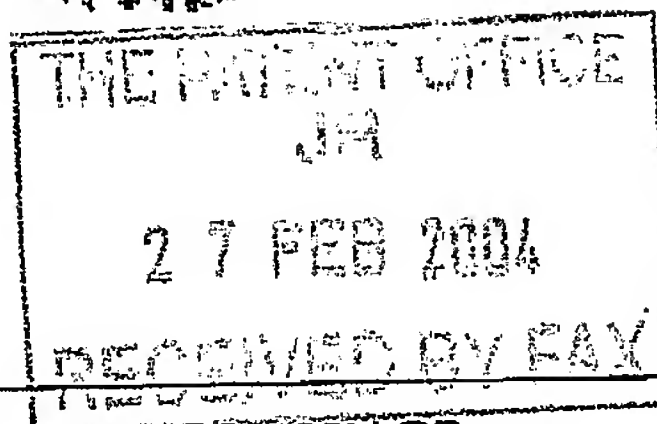

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your Reference

2. Patent Application number
(The Patent Office will fill in this part)

0404328.7

3. Full name, address and postcode of the or each applicant (underline all surnames)

1. YARDLEY, Christopher
3 Norwood Cottages
Lower Street, Fittleworth
Pulborough, West Sussex, RH20 1EN

27 FEB 2004

6237242001

Patents ADP Number (if you know it)

2. FARMER, Michael John Charles
12 Woodland Drive
Crawley Down, West Sussex, RH10 4UF

If the applicant is a corporate body, give the country/state of its incorporation

8818221001

4. Title of the invention

Improvements in Aircraft Doors

5. Name of your agent (if you have one)

FRY HEATH & SPENCE LLP

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The Gables
Massetts Road
Horley
Surrey
RH6 7DQ
United Kingdom

Patents ADP Number (if you know it)

05880273001

8459554001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications filed in the last 12 months.

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f).

Number of earlier application

Date of filing
(day / month / year)

8. Is a Patents Form 1/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? No

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form 0

Description 7

Claim(s) 4

Abstract 1

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 0Request for preliminary examination and search (*Patents form 9/77*) 1Request for substantive examination (*Patents form 10/77*) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

27 February 2004

12. Name and daytime telephone number of person to contact in the United Kingdom Victoria J Townsend - 01293 776880

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you filing or applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under sections 8(3), 12(6) and 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should complete part 6 with the priority details.

DUPLICATE

1

IMPROVEMENTS IN AIRCRAFT DOORS

This invention relates to aircraft doors of the type typically used on passenger transport aircraft, in particular the invention relates to an alarm system for alerting cabin crew when a door is "armed".

Doors of passenger transport aircraft are commonly fitted with inflatable slides to assist passenger evacuation in an emergency situation. Slides are typically stored in a bustle within the aircraft door. Such slides may be detachable from the aircraft to be used as life rafts. Prior to take off of an aircraft it is usual to "arm" the doors. This means a door is configured such that if it is opened, the emergency evacuation slide is released from the bustle. On release of the slide, gravity causes discharge of an associated gas pressurised cylinder which inflates the slide.

Whilst such a feature is desirable in the event of an emergency evacuation of the aircraft, if the armed door is opened while the aircraft is stationed at an airport, inflation and deployment of the slide can cause injury to airport ground crew. Also, once a slide has been deployed, the door cannot be operable as an emergency exit until the slide has been replaced, a consequence being that the number of passengers which can be safely transported by the aircraft is reduced. It will also be appreciated that repackaging and replacement of a slide is time consuming and expensive and is desirably avoided.

In order to avoid accidents or injury at airports, aircraft doors are fitted with one or more visual indicators of the status of the door, for example a door might include a light which displays in one colour when the door is armed and a different colour when the door is unarmed. Alternatively, a door might include a slidable or rotatable handle which can be moved between a position marked "ARMED" and a position marked

"DISARMED" and/or a slide placard which displays when the door is armed and is hidden when the door is not armed.

Whilst such indicators are generally effective, the inventors have recognised that in some circumstances a person might not register the indicator prior to acting to open the door. For example, the visual indicator may become obscured by another body, or a cabin crew member may be distracted when approaching the door and forget to check its status. As different aircraft have doors with different visual indicators, it is also conceivable that a cabin crew member operating on an aircraft of a type they have not previously encountered may misinterpret a visual indicator assuming a door to be disarmed when it is, in fact, armed.

It is an aim of the present invention to provide a novel aircraft door alarm system which alerts a door operator of the armed status of a door as the operator attempts to open the door.

In accordance with a first aspect, the present invention provides an alarm system for an aircraft door comprising;

- a sensor for sensing when the door operating handle is about to be gripped by an operator,

- an aural alarm associated with the sensor and operable to sound when the sensor detects that the handle is about to be gripped,

- means for arming the sensor and/or aural alarm when the aircraft door is armed.

The system may be incorporated into an operating handle for the door or may be retrofittable to an existing door handle. Most conveniently, the sensor may comprise a pressure sensor located on or in the handle which sensor responds to hand pressure of an operator gripping the

handle. Alternatively a sensor could be light, heat, humidity or chemically sensitive responding to contact with a characteristic of an operators hand.

The aural alarm is desirably electrically operated. The sound made by the alarm may be one or more tones, optionally a repeating sequence of tones. Alternatively, the alarm may broadcast a pre-recorded voice message indicating that the door is armed.

The means for arming the sensor and/or aural alarm may be manual or automatic. Desirably, arming is automatically effected when the door is armed. For example, the arming means may be mechanically, electrically, optically or magnetically coupled to an existing means for arming the door or an existing visual indicator for indicating the status of the door.

In one option, the arming means may include a sensor which is activated following a change in the status of the door. For example, the sensor may be a light sensor obscurable by an operating switch or handle for arming the door when the position of the switch or handle is changed. In another example, the arming means may include a magnetically sensitive switch such as a Reed switch which is responsive to a magnetic field which changes when a door is switched between an armed and an unarmed configuration.

The alarm system may include its own power source, for example but not strictly limited to a dry cell. Alternatively, the alarm system may tap power from an existing power source used to power the door and/or aircraft.

Desirably, the alarm system includes its own indicator that it has been armed. Such an indicator may, for example, be a light emitting diode which lights or pulses when the system is armed.

The system may be completely hard wired or may use one or more wireless connections between various of its components and/or existing components of the aircraft door. For example, there may be a blue tooth link between the sensor and alarm or between the means for activating the sensor and the sensor.

In another aspect, the invention comprises a handle for an aircraft door incorporating the previously described alarm system.

In yet another aspect, the invention comprises an aircraft door equipped with an alarm system as previously described.

For the purposes of illustration, one embodiment of the invention will now be further described with reference to the following Figures in which:

Figure 1 illustrates the front face of an aircraft door as is known in the prior art.

Figure 2 illustrates a handle for an aircraft door incorporating an embodiment of the alarm system of the invention.

Figure 3 illustrates a circuit diagram for an embodiment of an alarm system in accordance with the invention.

As can be seen from Figure 1 a typical aircraft door 1 (in this case a door used on a Boeing 757 aircraft) includes a viewing window 2, an operating handle 3 for opening and locking the door 1 and a door mode select panel 4a, 4b for arming and disarming the door 1. At the bottom of the door 1 is a bustle 5 in which an emergency evacuation slide (not shown) is stowed. Immediately above the bustle 5 is stowed a container

of pressurised gas for inflating the slide in the event of an emergency. A pressure gauge 6 displays the pressure of the gas on the front of the door 1. A pair of handles 7 are provided towards the top and right of the door 1 which an operator can use to manoeuvre the door 1.

The door mode select panel 4a, 4b comprises an operating switch 4a and a position indicator 4b. The position indicator 4b illustrates the direction in which the switch 4a need be switched to respectively arm and disarm the door 1. Just above the operating handle 3 is a slide placard 8. When the door 1 is disarmed, the slide placard is retained in the body of the door 1, flush with the surface of the door 1. When the door 1 is armed by appropriate operation of the switch 4a, the slide placard is caused to pop out of the door and display an indicator that the door is armed. At the top of the door 1 is an LED 9 which is lit when the door 1 is armed and not lit when the door 1 is disarmed. Thus there are three visual indicators (LED 9, slide placard 8 and display panel 4a, 4b) showing status of the door 1 as armed or disarmed.

Figure 2 shows the reverse side of a door operating handle 20 similar to that referenced 3 in Figure 1. The handle has a substantially C shaped cross section made up of walls 21a, 21b and the front surface (not shown) of the handle 20. A taller walled section 21b is provided at one end of the handle to allow attachment to the front of a door whilst providing a clearance around the remainder of the handle 20 so that it may be gripped.

Enclosed within the C section is an alarm system in accordance with the invention, 22, 23, 24, 25. Extending across a central portion of the handle is a pressure sensitive pad 22 enclosing an electrical circuit supplying the alarm system. Adjacent the pressure sensitive pad is an arming device 23 which is responsive to arming of an aircraft door to which the handle 20 is attached to arm the alarm system 22, 23, 24, 25.

Adjacent the arming device 23 is a speaker 24 of an alarm sounder. The system is powered by a battery pack enclosed in a container 25.

It will be appreciated that the components of the system as described in relation to Figure 2 could be re-ordered without affecting the mode of operation of the invention.

Figure 3 shows a circuit diagram for an alarm system substantially similar to the embodiment illustrated in Figure 2. The circuit comprises a 9v dry power cell 31 which powers pressure sensor 37.

The system is armed through arming device 32, 38 which comprises a Reed switch 32 and ceramic magnet 38. The ceramic magnet 38 is associated with a slide placard of an aircraft door, the Reed switch being positioned, in use, in close proximity to the placard and magnet 38. When a door to which the system is mounted is armed, the slide placard pops out and the magnetic field near the magnetically sensitive Reed switch 32 is magnified. The change in the field is such as to cause the switch 32 to close. The alarm system circuit is now armed. Once the system is armed but not activated (i.e. there is no detection of pressure by sensor 37) a battery saver circuit 33 pulses a low current supply to LED 34 which emits an intermittent light, this provides a visual indicator that the system is armed and in a "stand by" mode.

When the pressure sensor 37 is subjected to pressure, for example when the door handle is gripped, a sub circuit including the pressure sensor 37 and LED 34 is closed and the LED becomes permanently lit, taking current directly from the dry cell 31 indicating the alarm has been activated.

Simultaneously, a latch circuit 36 is closed and the latch circuit 36 grabs power from the cell 31. The active latch circuit 36 triggers the

broadcast of a timed, audible alarm, for example a pre-recorded voice message, through speaker/amplifier circuit 35.

Once the pressure sensor 37 is relieved of pressure, the supply conduits between the sensor 31 and each of the latch circuit 36 and LED 34 are closed, the alarm stops sounding and the LED reverts to blinking. Once the door is disarmed, the slide placard reverts to the "disarmed" position withdrawing the magnet 38 from the Reed switch 32 causing the switch 32 to open. The alarm system is then disarmed and the door can be operated without setting off the aural alarm.

It is to be understood that the forgoing is merely representative of one embodiment which the alarm system of the invention may take, other embodiments will no doubt occur to the skilled addressee without the need for inventive thought and without departing from the scope of the invention as claimed in the appended claims.

CLAIMS

1. An alarm system for an aircraft door comprising;
a sensor for sensing when the door operating handle is about to be gripped by an operator,
an aural alarm associated with the sensor and operable to sound when the sensor detects that the handle is about to be gripped,
means for arming the sensor and/or aural alarm when the aircraft door is armed.
2. An alarm system as claimed in claim 1 which is embodied in a door operating handle for an aircraft door.
3. An alarm system as claimed in claim 1 or claim 2 wherein the sensor comprises a pressure sensor.
4. An alarm system as claimed in claim 1 or claim 2 wherein the sensor is a light sensor.
5. An alarm system as claimed in any preceding claim wherein the aural alarm is electrically operated.
6. An alarm system as claimed in claim 5 wherein the aural alarm sounds one or more tones.
7. An alarm system as claimed in claim 6 wherein the aural alarm sounds a repeating sequence of tones.
8. An alarm system as claimed in claim 5 wherein the alarm sounds a pre-recorded voice message in one or more languages.

9. An alarm system as claimed in any preceding claim wherein the means for arming the sensor and/or aural alarm are automatic.
10. An alarm system as claimed in claim 9 wherein the arming means is mechanically, electrically, optically or magnetically couplable to an existing means for arming an aircraft door or an existing visual indicator for indicating the status of the aircraft door.
11. An alarm system as claimed in claim 10 wherein the arming means includes a sensor which is activated following a change in the status of the door.
12. An alarm system as claimed in claim 11 wherein the arming means sensor is a light sensor obscurable by an operating switch or handle for arming the door when the position of the switch or handle is changed.
13. An alarm system as claimed in claim 11 wherein the arming means includes a magnetically sensitive switch which is responsive to a magnetic field which changes when an aircraft door to which it is attachable is switched between an armed and an unarmed configuration.
14. An alarm system as claimed in claim 13 wherein the changing magnetic field is associated with a slide placard of an aircraft door to which the alarm system is attachable.
15. An alarm system as claimed in any preceding claim including its own power source.
16. An alarm system as claimed in claim 15 wherein the power source is a dry cell.

17. An alarm system as claimed in any of claims 1 to 14 wherein the alarm system is configured to tap power from an existing power supply of an aircraft door or aircraft to which it is attachable.
18. An alarm system as claimed in any of the preceding claims wherein the alarm system includes its own indicator that the system has been armed.
19. An alarm system as claimed in claim 18 wherein the arming system indicator is a light emitting diode which lights or pulses when the system is armed and ceases when the system is not armed.
20. An alarm system as claimed in any preceding claim wherein the system is hard wired.
21. An alarm system as claimed in any of claims 1 to 19 wherein the system includes one or more wireless connections between various of its components and/or existing components of an aircraft door to which it may be attached.
22. An alarm system as claimed in claim 21 wherein a blue tooth link is provided between the sensor and alarm or between the means for arming the sensor and the sensor.
23. An operating handle for an aircraft door incorporating the alarm system of any preceding claim.
24. An operating handle as claimed in claim 23 wherein the handle is substantially C shaped in cross section and one or more of the components of the alarm system are mounted in the C of the C shaped cross section.

25. An aircraft door incorporating an operating handle as claimed in claim 23 or claim 24.
26. An alarm system substantially as described herein and with reference to the accompanying Figures 2 and 3.

12

ABSTRACT**IMPROVEMENTS IN AIRCRAFT DOORS**

An alarm system for an aircraft door comprising;
a sensor 37 for sensing when the door operating handle is about to be gripped by an operator,
an aural alarm 35 associated with the sensor 37 and operable to sound when the sensor 37 detects that the handle is about to be gripped,
means 32, 38 for arming the sensor and/or aural alarm when the aircraft door is armed.

[Fig. 3]

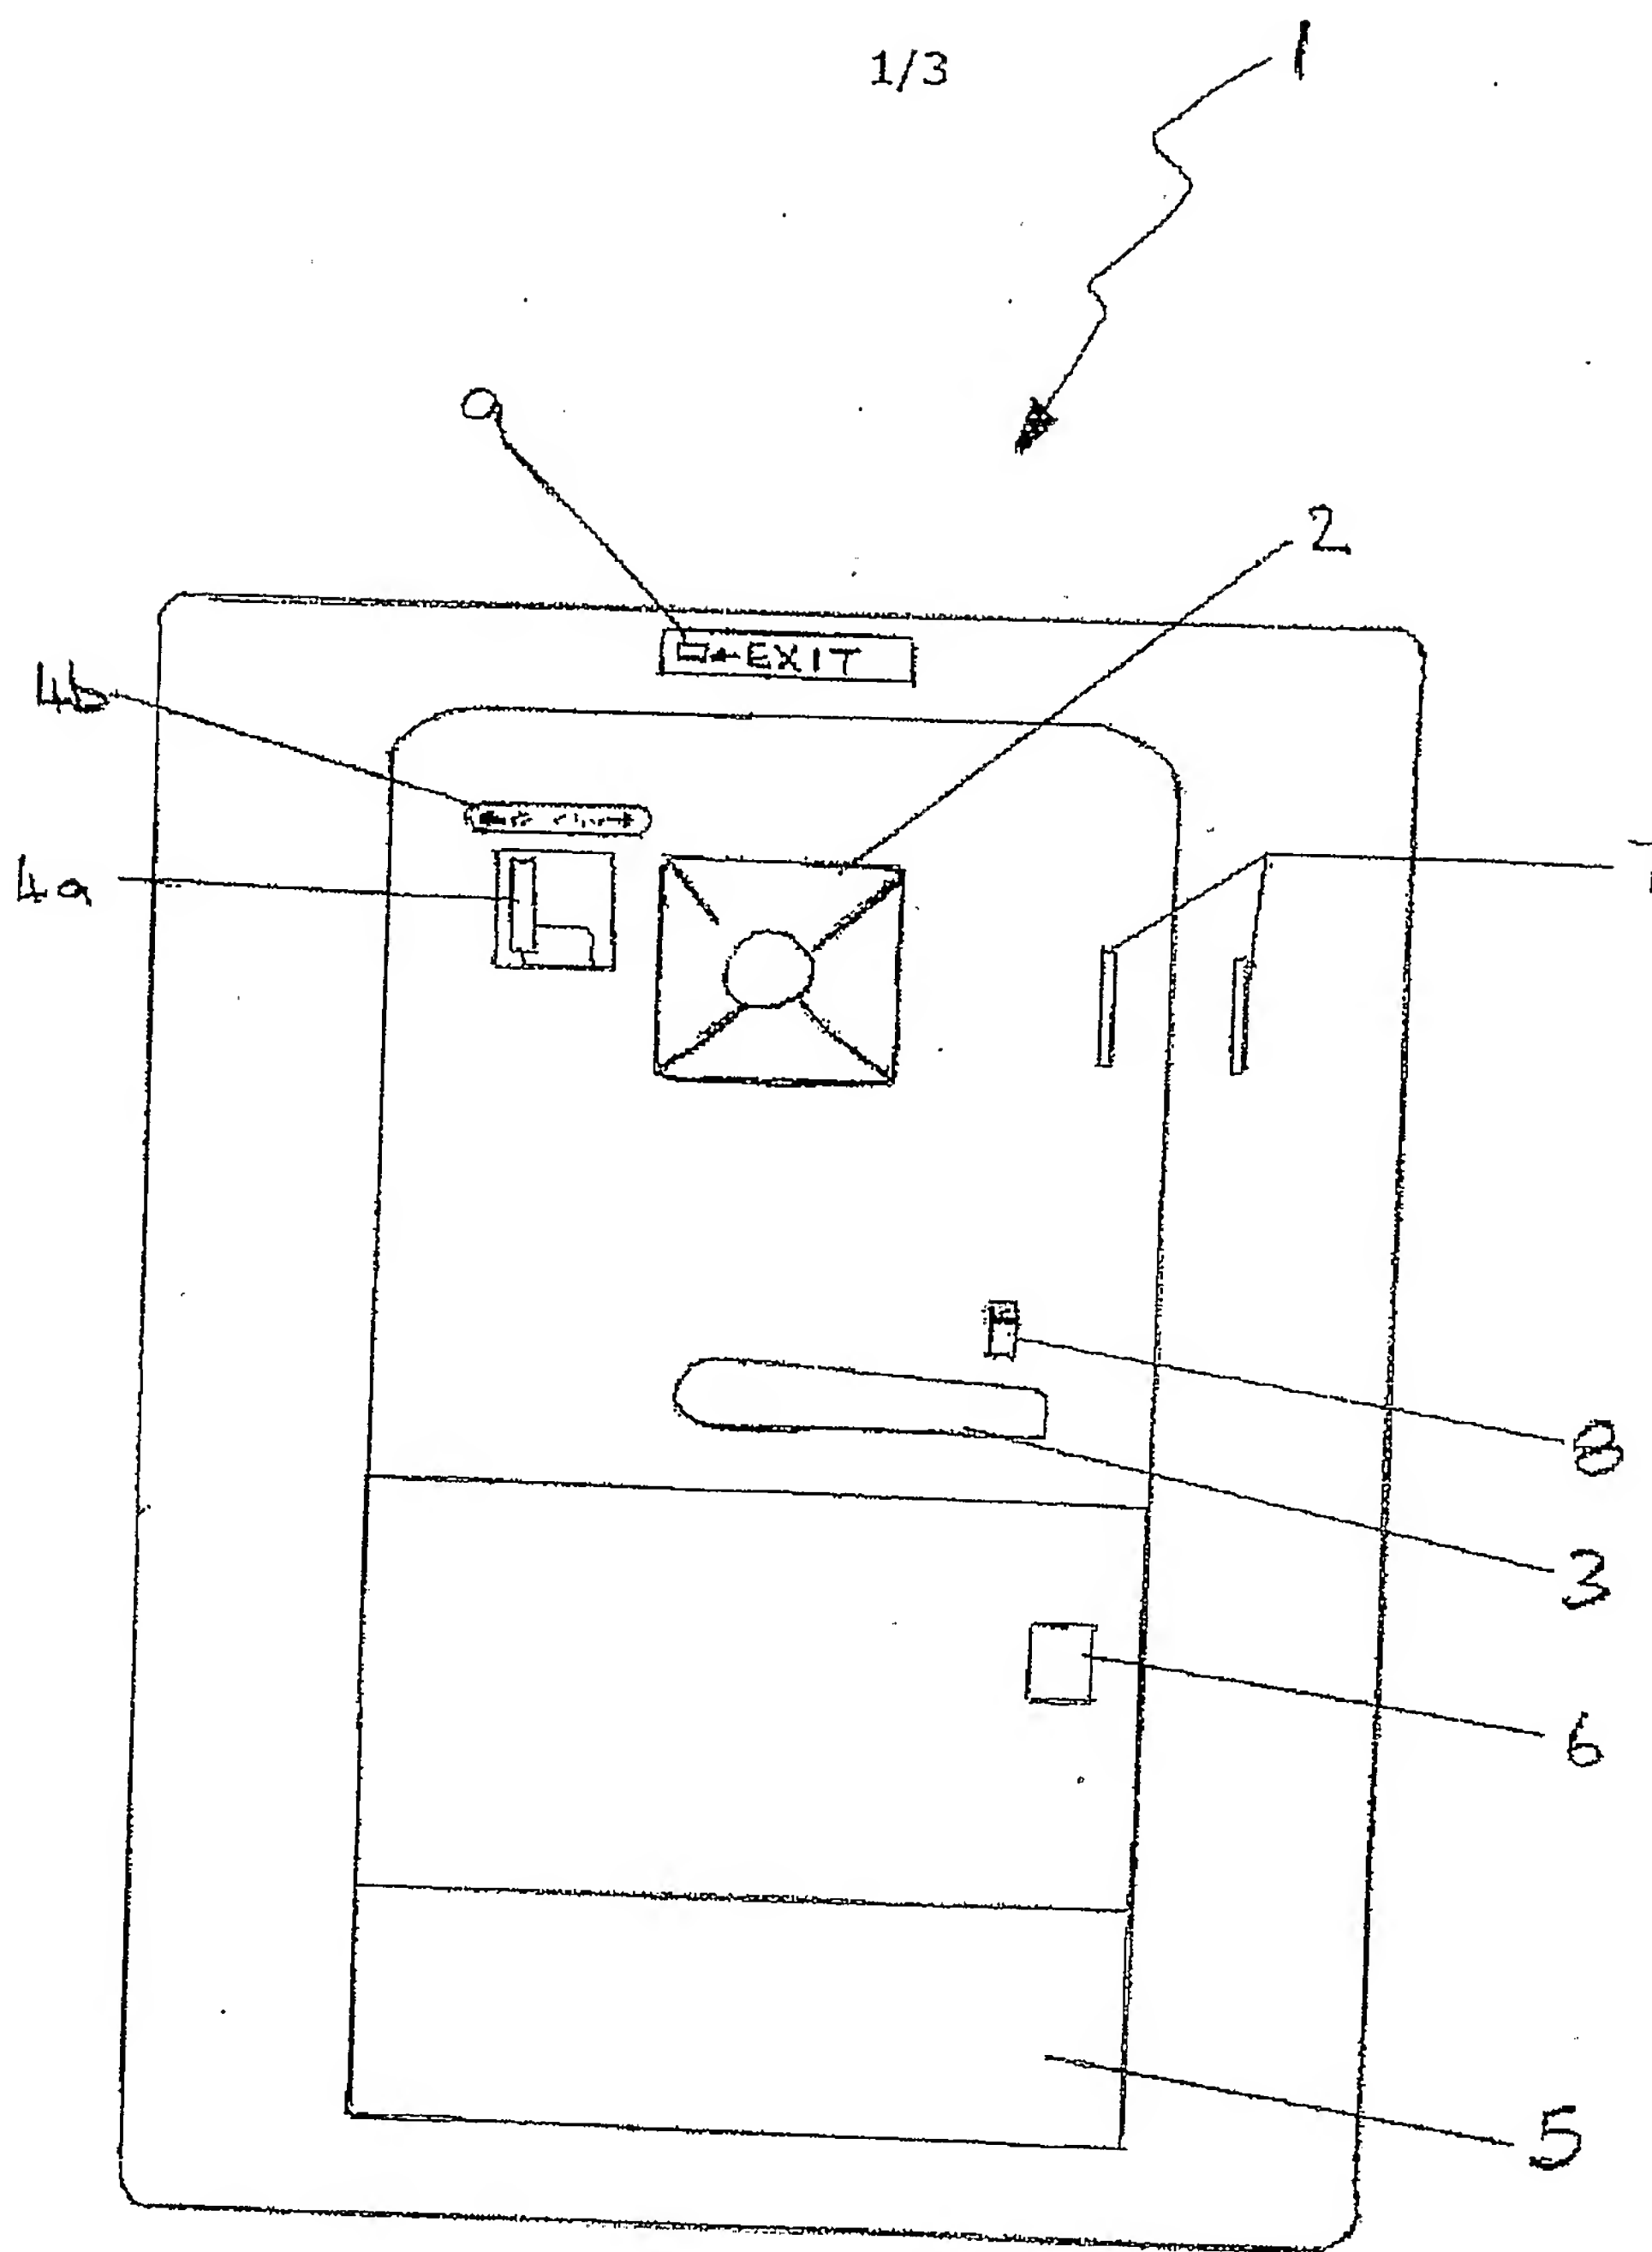


FIG. 1



2/3

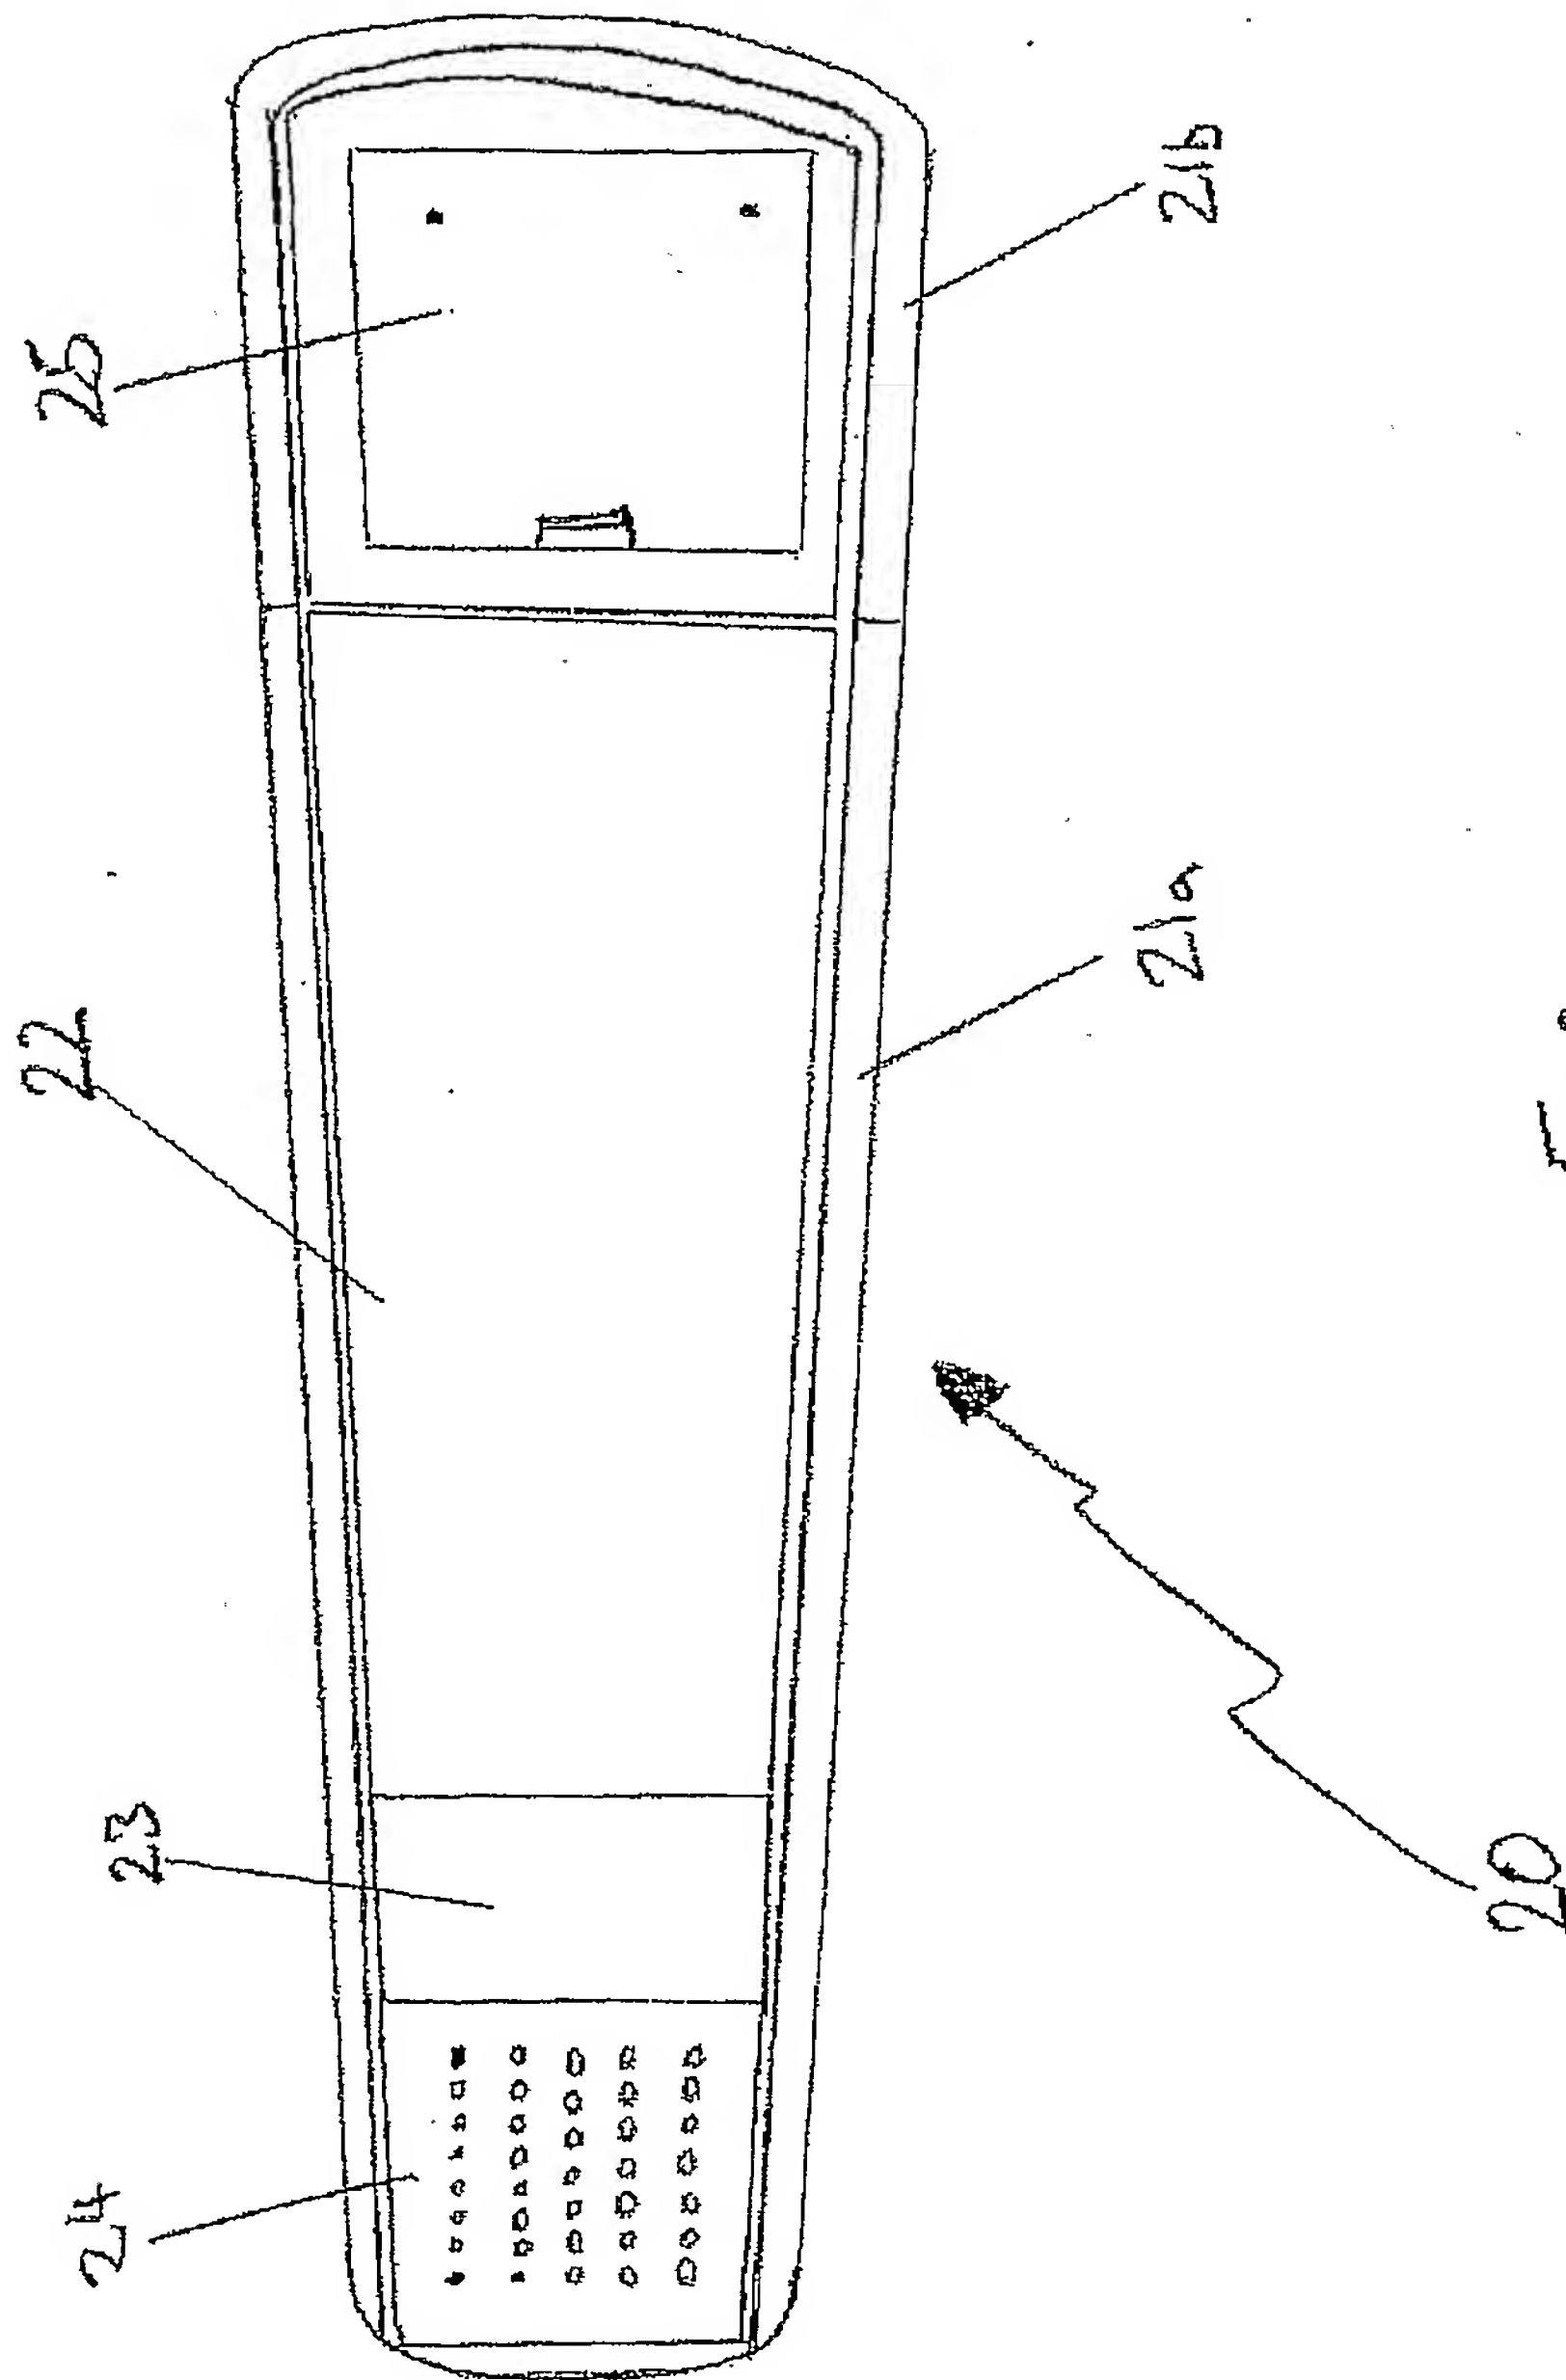


FIG. 2



3/3

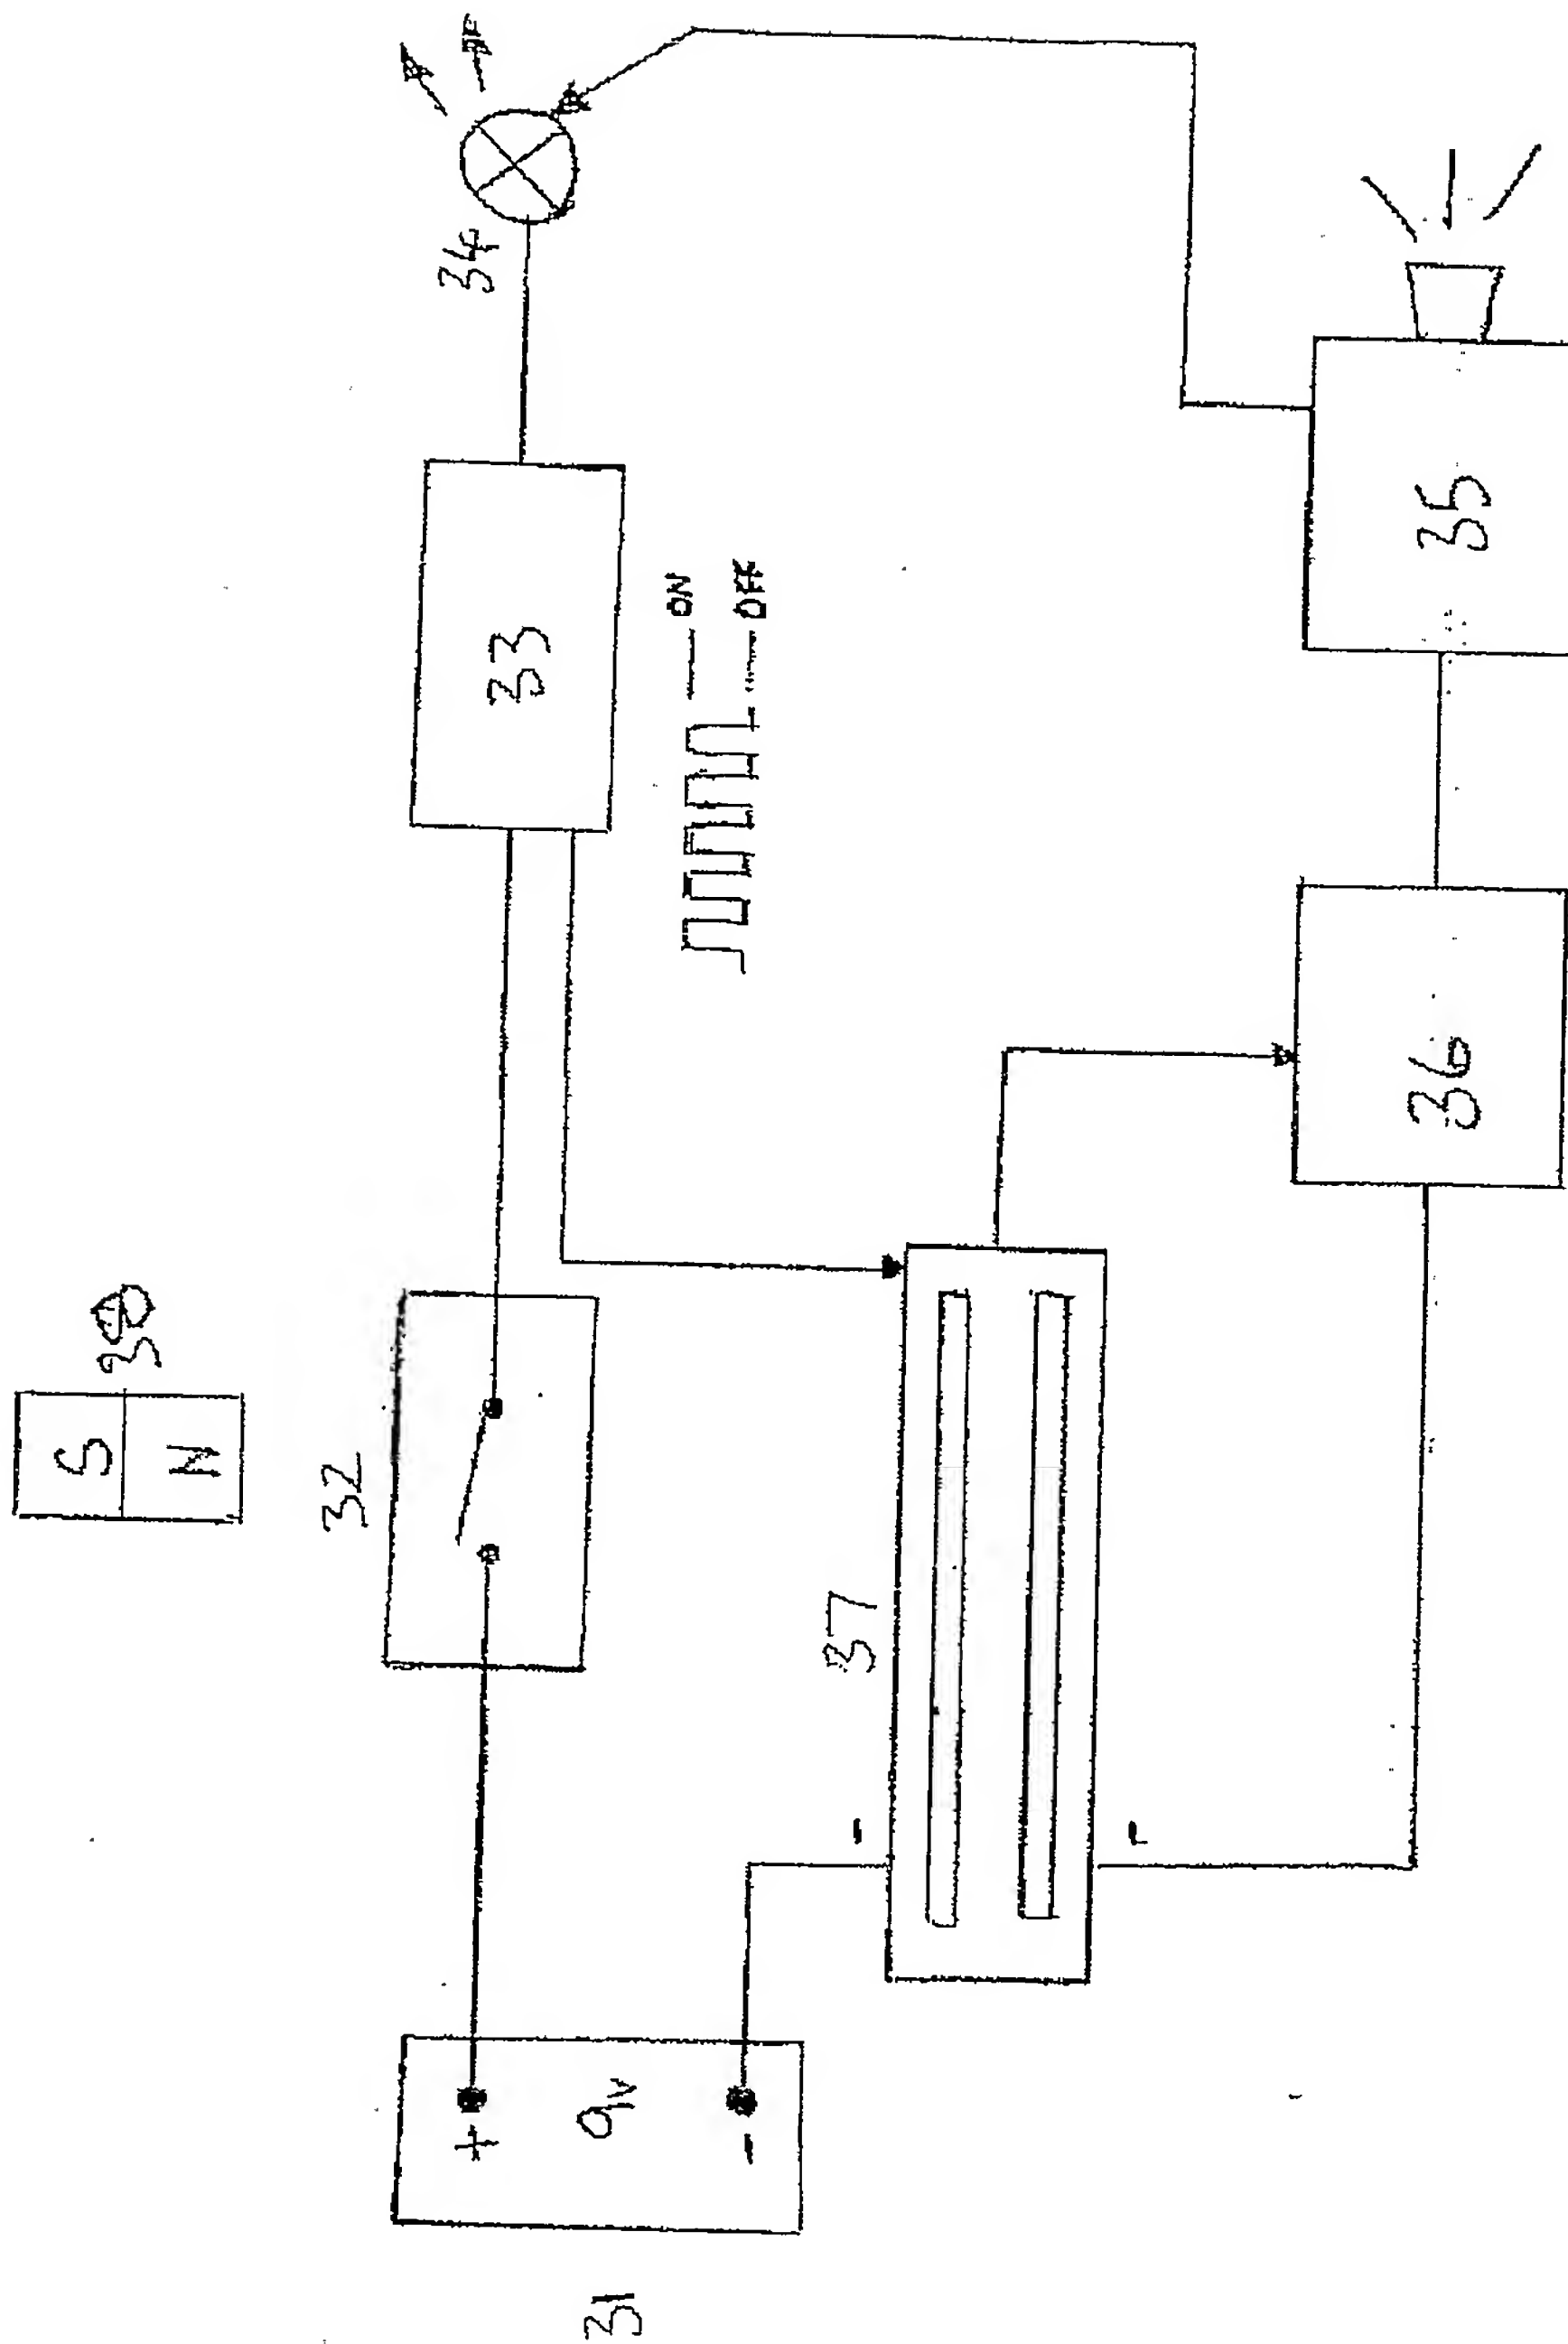


FIG. 3.

